

# SHUTTERING PANELS





The 3-ply shuttering panels have many possibilities of application.

## 1. CONSTRUCTION

3-ply shuttering panels with and without edge protection consist of 3 equal thick plies. The two longitudinal outer layers and the transverse inner layer are glued together water-resistant. Due to this construction swelling and shrinkage is nearly impossible.

## 2. ADVANTAGES

- true to size and dimensionally stable
- time and cost saving in processing
- a long durability is guaranteed at properly treatment
- resistant surface finish of melamine resin
- quality surveillance of production
- suitable as well for exposed concrete

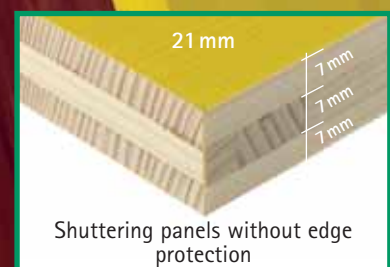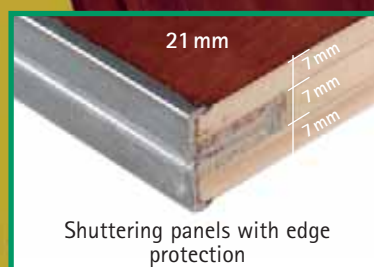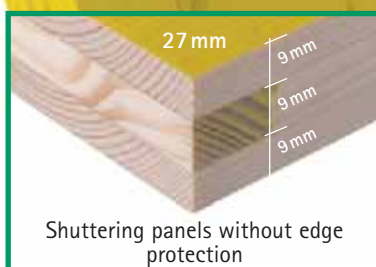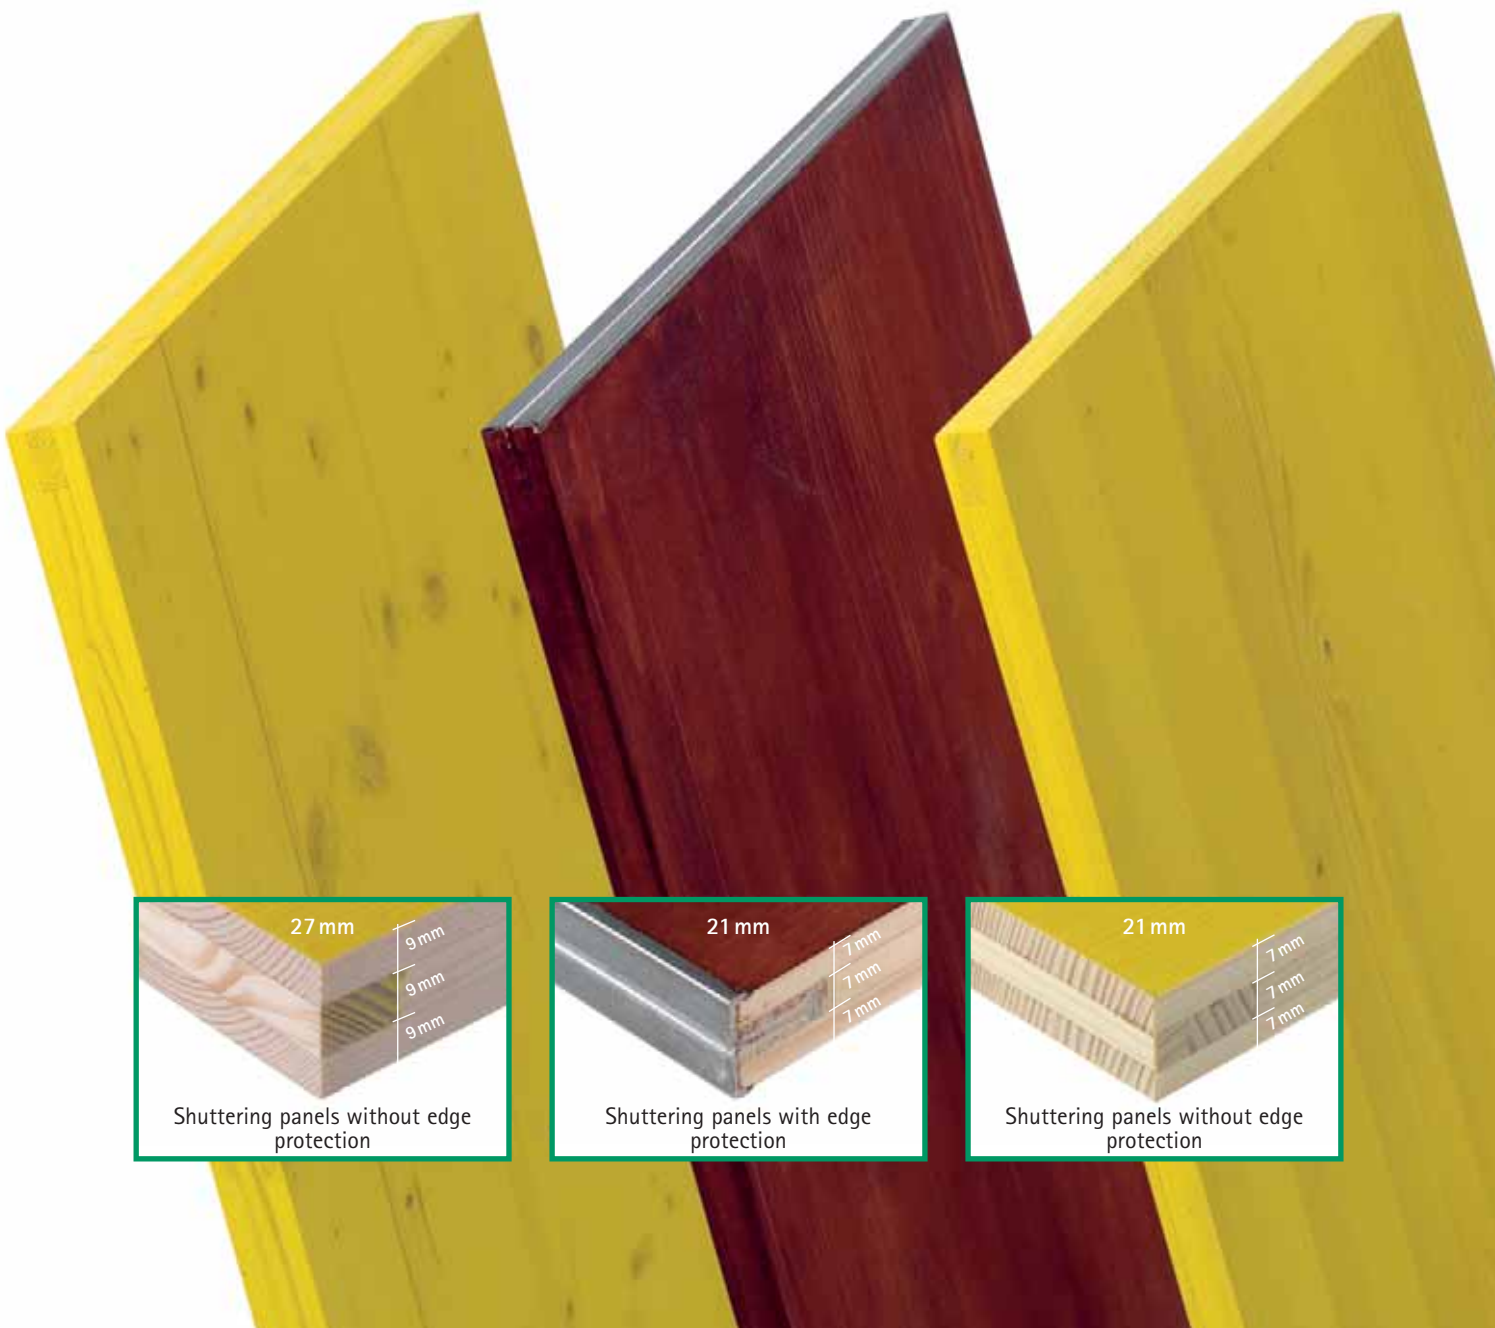

### 3. DELIVERY PROGRAM

Shuttering panels without edge protection  
Color: yellow

Dimensions

Thickness: 27 mm  
Width: 50 cm  
Length: 97, 100, 150, 197, 200, 250, 300 cm

Special dimensions

Thickness: 27 mm  
Width: 20, 25, 30, 35, 40, 45 cm  
Length: 300 cm

Shuttering panels with edge protection  
Color: red

Dimensions

Thickness: 21 mm  
Width: 50 cm  
Length: 100, 150, 200, 250 cm


Shuttering panels without edge protection  
Color: yellow

Dimensions

Thickness: 21 mm  
Width: 50 cm  
Length: 100, 150, 200, 250 cm

### ADDITIONAL DIMENSIONS ON REQUEST.

Deflection of 3-ply shuttering panels thickness 27 mm

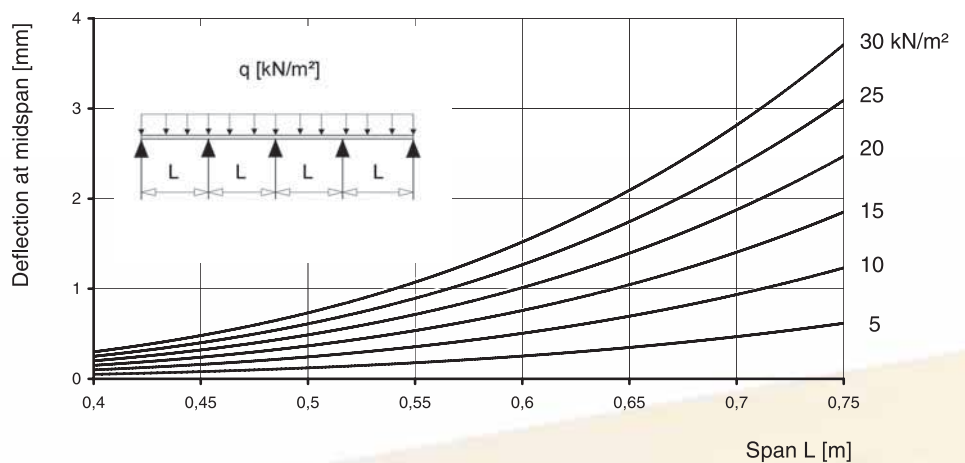

Deflection of 3-ply shuttering panels thickness 21 mm

